


Product Summary:



-  ZETA floor mounted racks are designed especially for CCTV/Server/Networking/Audio-Vid /Data Centre and Lab applications.
-  ZETA floor mount racks are made of cold rolled steel sheet and proceeded with CNC. Punching, forming, welding and p o w d e r coated to meet Industrial standard,
-  ZETA floor mount steel racks are in welded or CKD construction,. Top and Bottom welded, r i b b e d and provided with reinforced frames and supported by 4-fold depth members for extra rigidity.
-  ZETA floor mount steel racks are having ventilated top and bottom cover with cut-out for cable access, Provision for F a n s and fan tray mounting. Front single or dual doors glass/Vented/Plain/Perforated (Flat/Convex) with single- or 3-point locks, Rear single/dual door with vented/perforated/plain with single or 3- point locks. Side panels partially vented/plain and for 1000 / 1200 mm. Deep rack will be configured with dual side panels. Racks with 4 nos. of heavy- duty castor wheels (2 with break and 2 nos. without break) along with adjustable legs/plinth
-  Available in 17U~52U variants with 600 & 800mm. width configuration and 600, 650, 800, 1000 & 1200mm. Depth configurations.

Product details:

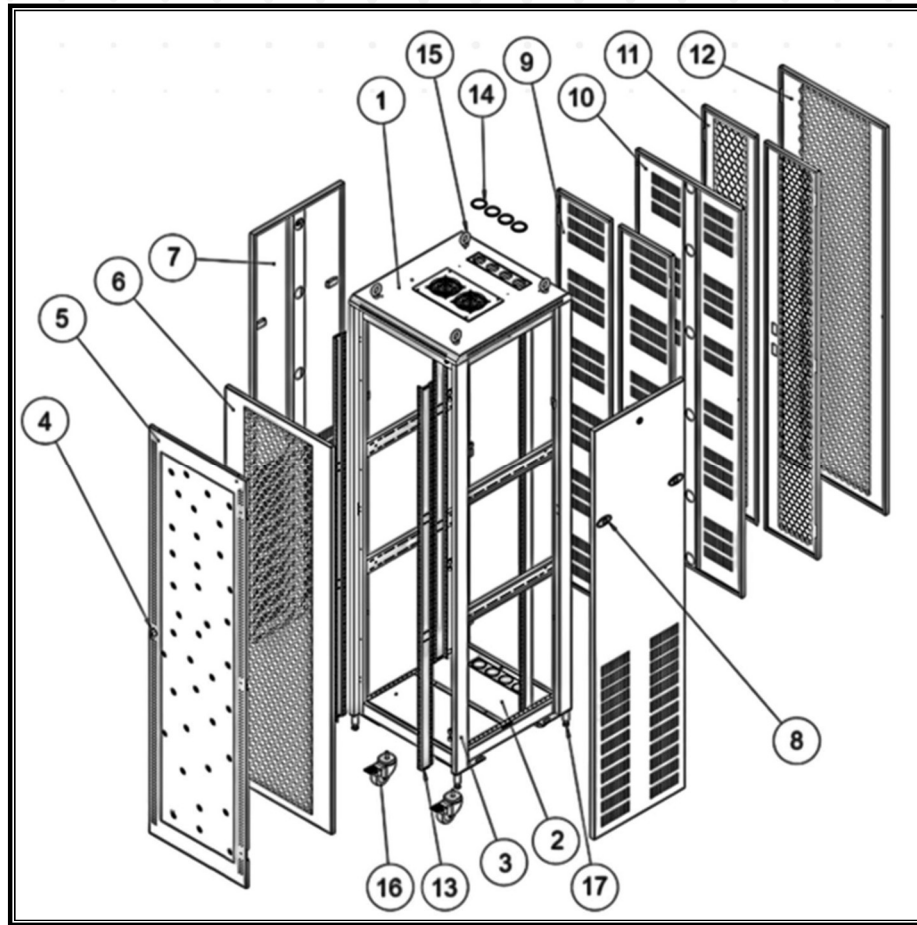

1.	Top panel vented/Plain with cable entry access.	10.	Rear door vented-Single
2.	Bottom Panel with cable entry access.	11.	Rear door Perforated-Dual
3.	Main Body	12.	Rear door perforated-Single
4.	Cam lock	13.	19" Mounting angle
5.	Front door-Glass	14.	Rubber grommet / Gland plate
6.	Front door-Perforated	15.	Lifting hooks
7.	Side panel vented	16.	Castor wheels
8.	Slam latch	17.	Levelling legs
9.	Rear door vented-Dual		

Features:

-  Conforms to DIN 41494/EIA 310 or equivalent ISO standard. 100% assured compatibility with all equipment conforming to DIN 41494.
-  ISO 9001, ISO 14001 & ISO 45001 Certified
-  Adjustable 19" equipment mounting angles with U marking provide the better mounting flexibility, maximize the usable mounting space.
-  Depth adjustable mounting slots
-  . Grounding and Bonding Options.
-  Precision engineering capabilities confirm the best product quality and fastest delivery in the industry.
-  Top and bottom Panel with ventilation and cable entry facility.
-  Design & Construction confirms to UL2416 Standard
-  High grade CRCA Sheet of various sheet thickness
-  Provision to mount the cooling fans on the top panel.
-  Powder coated finish with Seven Tank pre-treatment process meeting all industrial standards
-  500 Hrs. Salt Spray Test Certified on powder coating for better durability.

Technical data:

RACK STANDARD	Conforms to DIN 41494 or equivalent standard
CONSTRUCTION	Welded or CKD (Knock down)
BASIC FRAME	Steel four pillars with steel end frame
FRONT DOOR	Lockable toughened Glass / perforated steel
REAR DOOR	Lockable vented / perforated single / dual with 63% perforation.
EQUIPMENT MOUNTING	DIN Standard 10mm. Square slots
19" MOUNTING ANGLE	Formed steel 2mm thick fully recess able
STANDARD FINISH	Powder Coating
COLOR OPTIONS	Gray, Black or any customized color
TOP AND BOTTOM	Welded, with necessary ventilation and Cable entry cut outs

STANDARD MOUNTING OPTION	Castor wheels (2 W/break and rear W/O break) with levelers / Base frame
STATIC LOAD	1000 kgs. with castors, 1200 kgs. with base frame/plinth. (Recommended to distribute the load along with U space in the rack.

Product codes and Dimensions:

RT code:	Total height in MM. (H)	Usable height in MM. (h)	Total width in MM. (W)	Usable width in Inches (w)	Total Depth in MM. (D)	Usable Depth in MM. (d)
ZFM-6060-17U	960.00	755.65	600	19"	600	500
ZFM-6060-24U	1270.00	1066.80				
ZFM-6060-27U	1404.00	1200.15				
ZFM-6060-32U	1626.00	1422.40				
ZFM-6060-36U	1803.00	1600.20				
ZFM-6060-42U	2050.00	1866.90				
ZFM-6080-17U	960.00	755.65	600	19"	800	700
ZFM-6080-24U	1270.00	1066.80				
ZFM-6080-27U	1404.00	1200.15				
ZFM-6080-32U	1626.00	1422.40				
ZFM-6080-36U	1803.00	1600.20				
ZFM-6080-42U	2050.00	1866.90				
ZFM-6010-17U	960.00	755.65	600	19"	1000	900
ZFM-6010-24U	1270.00	1066.80				
ZFM-6010-27U	1404.00	1200.15				
ZFM-6010-32U	1626.00	1422.40				
ZFM-6010-36U	1803.00	1600.20				
ZFM-6010-42U	2050.00	1866.90				
ZFM-8010-17U	960.00	755.65	800	19"	1000	900
ZFM-8010-22U	1181.00	977.90				
ZFM-8010-27U	1404.00	1200.15				
ZFM-8010-32U	1626.00	1422.40				
ZFM-8010-36U	1803.00	1600.20				
ZFM-8010-42U	2060.00	1866.90				
ZFM-6012-45U	2203.00	2000.25	800	19"	1200	1000
ZFM-8012-48U	2335.00	2133.60	800	19"	1200	1000
ZFM-8012-52U	2515.00	2311.40	800	19"	1200	1000

Note:

1. Overall Height = Frame Height + Plinth or Caster.
2. Other models can be manufactured on request.
3. It is recommended to distribute the load along with "U" space in the rack.
4. All dimensions are in mm.